


HL Series HL510

AIR-OIL HEAT EXCHANGERS


IP68

12/24
Volt

Ventilation
A/Pulling
P/Pushing

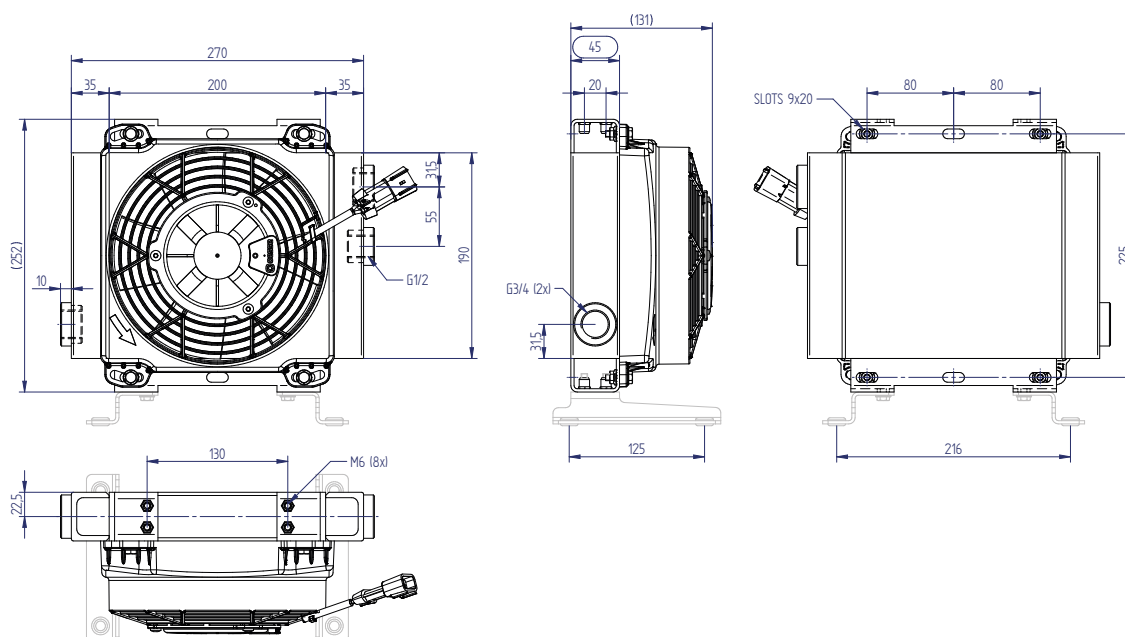


Performance

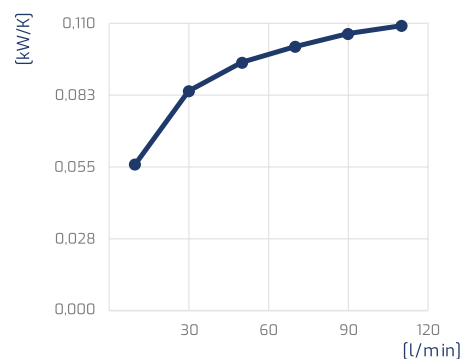

Oil T 80°C
T Amb. 40°C
1kW = 860 Kcal/h - 1HP = 0,75 kW

Pressure drop

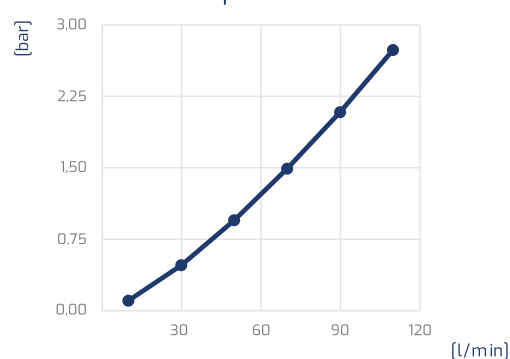

ISO VG 32 at 40°C

Viscosity - ISO VG 32 Oil

Oil	22	32	46	68	150
Correction factor				1,6	3

Technical data

Item	Oil flow	Weight	Voltage	Current absorption	Ø Fan	Air flow
	[l/min]	[kg]	[V]	[A]	[mm]	[m³/h]
HL510112VA/P	10 - 80	3,5	12	8,4	190	690
HL510124VA/P	10 - 80	3,5	24	4,2	190	690

Packaging

Packaging	Dimensions	Total gross weight Kg (including pallet)
n.5 pcs	80x80x50	24,5
n.10 pcs	80x80x50	42
n.25 pcs	80x120x65	101,5
n.50 pcs	80x120x85	189